


SRO Series

Radial EDLC Module 引线式EDLC 模组

Typical applications 典型应用

- Intelligent instruments: electronic, water, gas and heat meters
- Communication terminals: RTU/DTU, DTU, FTU, fault-current indicators
- Consumer products: toys, robots, smart-home and medical devices
- Auto electronics: recorders, door/audio controls, diagnosis systems, wireless charging
- Energy storage: server backup, motor drives, brake/charging piles, security, fire protection

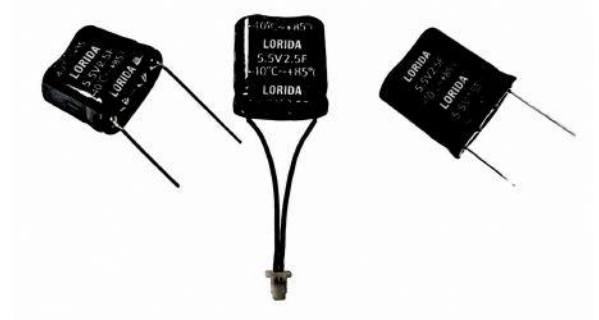

Branding illustration / 品牌外观示意

Electrical characteristics 电气特性

Parameter / 项目	Specification / 规格
Rated voltage / 额定电压	5.5 V
Operating temperature / 工作温度	-40 to +85 °C
Surge voltage / 浪涌电压	5.7 V
Capacitance range / 容量范围	0.5-25 F
Capacitance tolerance at 25 °C / 容量偏差	-10% to +30%


Reliability characteristics 可靠性特性

Test / 项目	Condition / 条件	Requirements / 要求
Temperature characteristics 温度特性	-40 to +85 °C -40 至 +85 °C	Capacitance change: within 30% of initial value at 25 °C ESR _{AC} : "4 × initial specified value 容量变化: 30% 以内; 内阻: ≤4 倍
High-temperature load 高温负荷	Rated voltage, 85 °C, 1,000 h (source EN) 5.0 V, 85 °C, 1,000 小时 (原中文)	Capacitance change: within 30% of initial value ESR _{AC} : "4 × initial specified value 容量变化: 30% 以内; 内阻: ≤4 倍
High-temperature storage 高温存储	85 °C, 1,000 h 85 °C, 1,000 小时	Capacitance change: within 30% of initial value ESR _{AC} : "4 × initial specified value 容量变化: 30% 以内; 内阻: ≤4 倍
Cycle life 循环寿命	500,000 cycles, 25 °C V _R to ½V _R 500,000 次充放电循环, 25 °C	Capacitance change: within 30% of initial value ESR _{AC} : "4 × initial specified value 容量变化: 30% 以内; 内阻: ≤4 倍

SRO Series

Radial EDLC Module 引线式EDLC 模组

Dimensions 外形尺寸

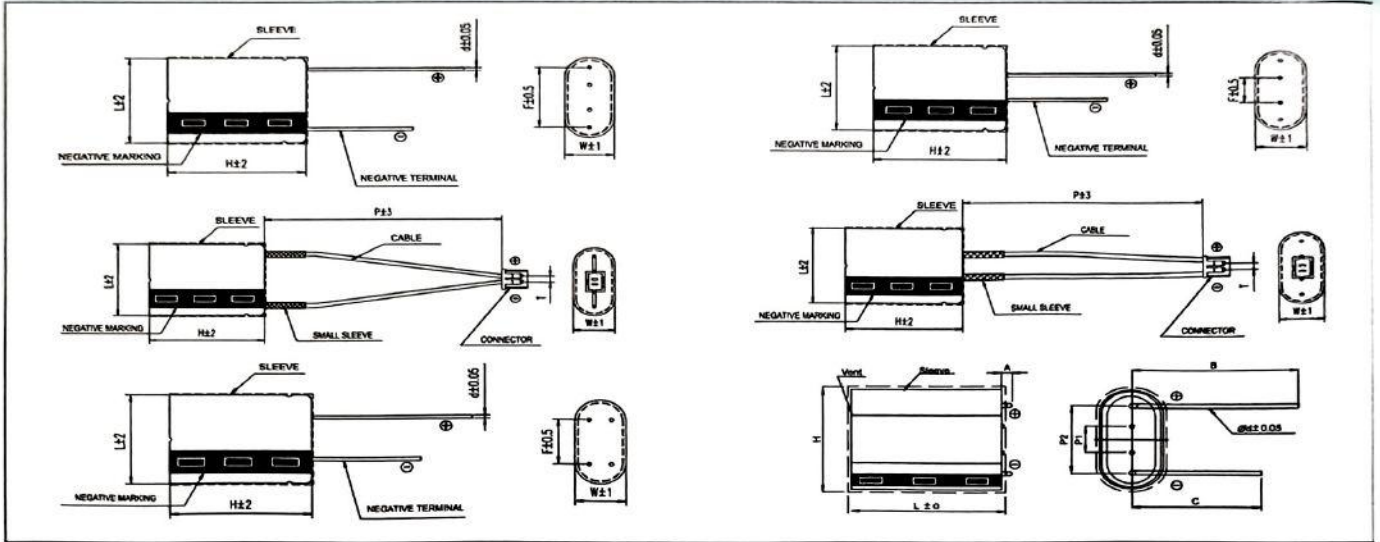

Dimensions in mm. Tolerances are shown in the drawing.

Ratings and part numbers 额定值与料号

Ur (Surge Voltage) Code 额定电压 (浪涌电压) 代码	Rated Capacitance 额定容量 25℃	Impedance 内阻		Leakage Current 漏电流 (72hrs)	Size 尺寸 (L x W x H)	Pin spacing 引脚间距 (F)	Wire diameter 引线直径 (d)	P/N 产品代码
		ESR _{DC} 直流内阻	ESR _{AC} 交流内阻 (1KHz)					
(v)	(F)	(mΩ)	(mΩ)	(mA)	(mm)	(mm)	(mm)	-
5.5 (5.7) 5R5	0.5	1600	800	0.01	17 x 8.5 x 16	12/5.0	0.6	SCMDOR5R5504QRH081716ET0H0P120A
	1	660	340	0.012	17 x 8.5 x 16	12/5.0	0.6	SCMDOR5R5105QRH081716ET0H0P120A
	1.5	340	180	0.014	17 x 8.5 x 22	12/5.0	0.6	SCMDOR5R5155QRH081722ET0H0P120A
	2.5	780	400	0.02	17 x 8.5 x 27	12/5.0	0.6	SCMDOR5R5255QRH081727ET0H0P120A
	2.5	340	180	0.02	21 x 11x 22	15.5/5.5	0.6	SCMDOR5R5255QRH112122ET0H0P155A
	3.5	420	220	0.03	17 x 8.5x 32	12/5.0	0.6	SCMDOR5R5355QRH081732ET0H0P120A
	3.5	340	180	0.03	21x 11x 22	15.5/5.5	0.6	SCMDOR5R5355QRH112122ET0H0P155A
	3.5	260	140	0.03	21 x11 x27	15.5/5.5	0.6	SCMDOR5R5355QRH112127ET0H0P155A
	5	380	200	0.045	21 x11 x27	15.5/5.5	0.6	SCMDOR5R5505QRH112127ET0H0P155A
	5	220	120	0.045	26 x 13 x 23	18/8	0.6	SCMDOR5R5505QRH132623ET0H0P180A
	5	220	120	0.045	21 x 11 x 33	15.5/5.5	0.6	SCMDOR5R5505QRH112133ET0H0P155A
	5	220	120	0.045	26 x 13 x 27	18/8	0.6	SCMDOR5R5505QRH132627ET0H0P180A
	8	160	90	0.055	26 x 13 x 27	18/8	0.6	SCMDOR5R5805QRH132627ET0H0P180A
	8	160	90	0.055	26 x 13 x 33	18/8	0.6	SCMDOR5R5805QRH132633ET0H0P180A
	10	132	76	0.055	33 x 17 x 24	24/9	0.8	SCMDOR5R5106QRH173324ET0H0P240A
	10	132	76	0.07	26 x 13 x 27	18/8	0.6	SCMDOR5R5106QRH132627ET0H0P180A
	10	132	76	0.07	26 x 13 x 33	18/8	0.6	SCMDOR5R5106QRH132633ET0H0P180A
	12	120	70	0.1	33 x 17 x 29	24/9	0.8	SCMDOR5R5126QRH173329ET0H0P240A
	15	120	70	0.12	33 x 17 x 35	24/9	0.8	SCMDOR5R5156QRH173335ET0H0P240A
	18	104	62	0.15	33 x 17 x 35	24/9	0.8	SCMDOR5R5186QRH173335ET0H0P240A
	20	104	62	0.25	33 x 17 x 39	24/9	0.8	SCMDOR5R5206QRH173339ET0H0P240A
	25	100	60	0.35	37 x 18 x 43	26/11	0.8	SCMDOR5R5256QRH183743ET0H0P260A